




Drop-out Fuse Cutout

Drop-out fuse cutouts are designed to provide protection to the lines of the systems and distribution transformer against overload and short circuit damage, as well as other disconnecting equipments. WINNING® supplies both Porcelain Housed (Leakage Distance: 220 to 860mm) and Polymer Housed fuse cutouts up to 36kV.

Illustration of Standard Porcelain-Housed Fuse Cutout

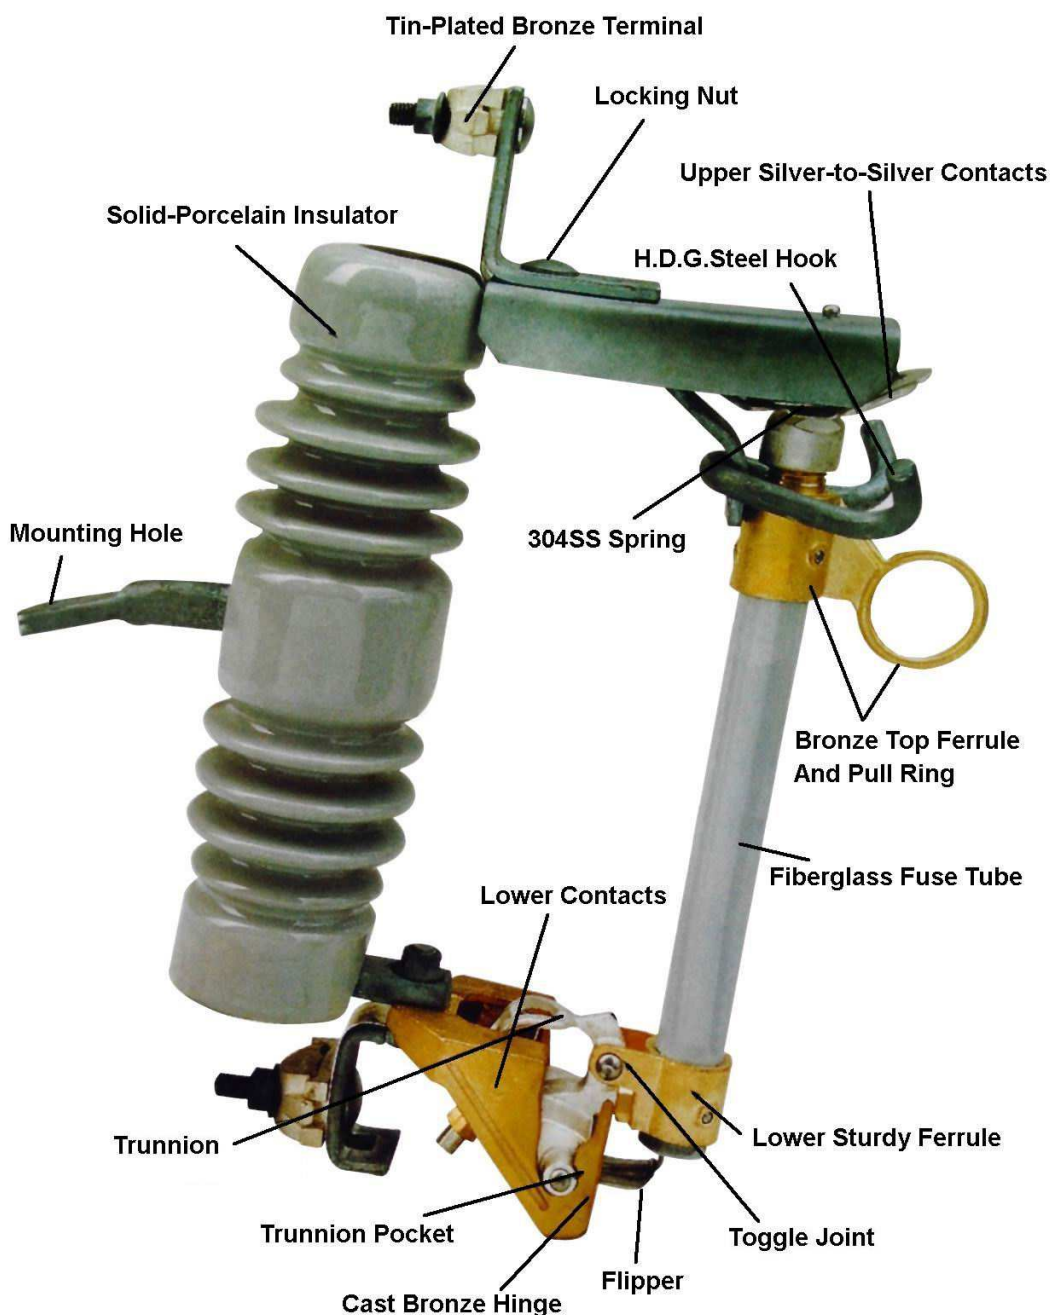



Specifications of Porcelain Fuse Cutout



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-1	15	100	10000	110	40	220	7.3	38.5*34.5*10.5
WSC-1	15	200	12000	110	40	220	7.3	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-2	15	100	10000	110	40	220	7.5	40*34.5*10.5
WSC-2	15	200	12000	110	40	220	7.5	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-3	15	100	10000	110	40	220	7.3	38.5*34.5*10.5
WSC-3	15	200	12000	110	40	220	7.3	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-4	15	100	8000	110	40	340	7.3	42*33*11.5
WSC-4	15	200	10000	110	40	340	7.3	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-7	15	100	6000	110	42	340	8	49*27*11.5
WSC-7	15	200	8000	110	42	340	8	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-9	15	100	10000	110	40	300	7.5	39*34.5*10.5
WSC-9	15	200	12000	110	40	300	7.5	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-11	15	100	10000	110	40	260	8.5	48.5*44.5*13.5
WSC-11	15	200	12000	110	40	260	8.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-12	15	100	10000	125	45	320	8.5	48.5*35*10.5
WSC-12	15	200	12000	125	45	350	8.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-13	15	100	10000	125	45	320	8.5	51.5*34*12
WSC-13	15	200	12000	125	45	350	8.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-14	15	100	10000	125	45	320	8.5	47*33.5*10
WSC-14	15	200	12000	125	45	350	8.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-15	15	100	10000	125	45	320	8.5	48*35*10.5
WSC-15	15	200	12000	125	45	350	8.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-16	15	100	10000	125	45	320	12	50*36*13
WSC-16	15	200	12000	125	45	350	12	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-17	15	100	10000	125	45	320	8.5	48*35*10.5
WSC-17	15	200	12000	125	45	350	8.5	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-18	24	100	8000	150	65	530	12	50.5*36*17
WSC-18	24	200	10000	150	65	530	12	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-19	24	100	6000	150	65	530	12	49*37*17
WSC-19	24	200	10000	150	65	530	12	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-20	24	100	6000	150	65	470	13	56*38*10.5
WSC-20	24	200	10000	150	65	470	13	



27KV-33KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-21	33	100	6000	170	70	660	15	59*37*17
WSC-21	33	200	8000	170	70	660	15	



33KV-36KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-22	36	100	6000	170	70	720	15.5	66*37*17
WSC-22	36	200	8000	170	70	720	15.5	



33KV-36KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-24	36	100	6000	170	70	870	16	98*44*18
WSC-24	36	200	8000	170	70	870	16	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-26	24	100	8000	150	65	530	12	49*37*17
WSC-26	24	200	10000	150	65	530	12	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-27	24	100	8000	150	65	530	12	48*37*17
WSC-27	24	200	10000	150	65	530	12	



27KV-33KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-29	33	100	6000	170	70	660	15	59*36*17
WSC-29	33	200	8000	170	70	660	15	



36KV-38KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-30	36	100	6000	180	75	850	17	65*37*17
WSC-30	36	200	8000	180	75	850	17	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-31	24	100	8000	150	65	530	12	50.5*37*17
WSC-31	24	200	10000	150	65	530	12	



27KV-33KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-32	33	100	6000	170	70	660	15	59*36*17
WSC-32	33	200	8000	170	70	660	15	



36KV-38KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-33	36	100	6000	180	75	850	17	66*36*17
WSC-33	36	200	8000	180	75	850	17	



10KV-15KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-34	15	100	10000	110	40	230	7.5	49*35*11.5
WSC-34	15	200	12000	110	40	230	7.5	



15KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-36	15	100	10000	125	45	230	9.4	55*44*11.5
WSC-36	15	200	12000	125	45	230	9.4	



24KV-27KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-37	24	100	10000	150	65	530	12	55*44.5*20
WSC-37	24	200	12000	150	65	530	12	



36KV-38KV

Type	Rated Voltage (kV)	Rated Current (A)	Breaking Current (A)	BIL (kV)	Power Frequency Withstand Voltage(kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (CM)
WSC-40	36	100	6000	170	70	850	17.5	72.5*44.5*18
WSC-40	36	200	8000	170	70	850	17.5	

